

663BLHI-V 三节全拉开隐藏式阻尼滑轨 外置阻尼器

Full Extension Soft Close Concealed Slide With Outer Damper

883BHF 三节按压+缓冲隐藏轨

Full Extension Push Open + Soft Close Concealed Slide

kav®


描述 Description

- 缓冲关闭隐藏式全拉出滑轨
- 动态负载: 30KG(18")
- 材质: 镀锌钢板
- 材料厚度: 1.5x1.5x1.8mm
- 可选快速拆装扣手, 抽屉可快速安装和拆卸
- 抽屉面板高度间隙可调 1-3mm
- 适用抽墙板厚: 16mm/18mm
- 可选长度规格: 250mm-600mm
- 包装规格: 10套/箱
- Full extension soft close concealed slide
- Load capacity: 30KG(18")
- Material: Environmental Galvanized Sheet
- Material thickness: 1.5x1.5x1.8mm
- Clip on handle is available for easy installation
- Drawer front height can adjust to 1-3mm
- Suitable drawer wall thickness: 16mm/18mm
- Length: 250mm-600mm
- Packing: 10 sets/ctn


产品 Product



侧轨安装孔位置 Cabinet profile screw positions

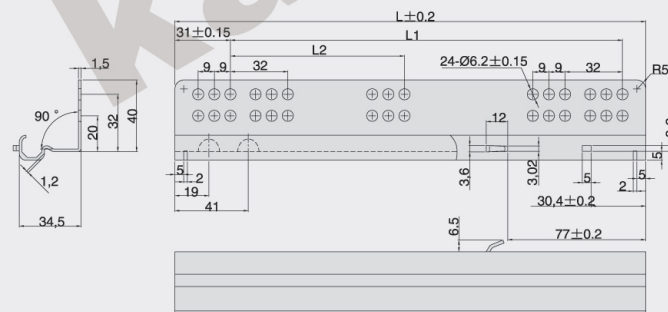

Size inch	L mm	L1 mm	L2 mm
10"	170	128	
12"	203	160	
14"	235	192	
16"	305	224	
18"	320	256	
20"	350	256	
22"	370	320	192

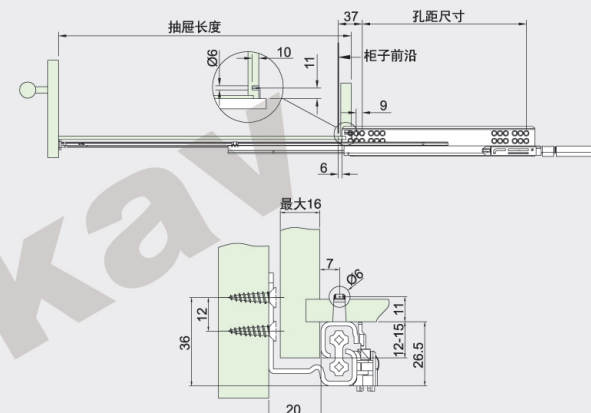


产品型号	抽屉长度 (mm)	最少柜深 (mm)	孔距尺寸 (mm)
12"(300)	300	313	160
14"(350)	350	363	160
16"(400)	400	413	256
18"(450)	450	463	256
20"(500)	500	513	288
22"(550)	550	563	288

描述 Description

- 按弹开启+缓冲关闭隐藏式全拉出滑轨
- 动态负载: 30KG(18")
- 材质: 镀锌钢板
- 材料厚度: 1.8x1.5x1.0mm
- 带快速拆装扣手, 抽屉可快速安装和拆卸
- 抽屉面板高度间隙可调 1-3mm
- 适用抽墙板厚: 16mm/18mm
- 可选长度规格: 250mm-600mm
- 包装规格: 10套/箱
- Full extension push open+soft close concealed slide
- Load capacity: 30KG(18")
- Material: Environmental Galvanized Sheet
- Material thickness: 1.8x1.5x1.0mm
- With fast click on handle for easy installation
- Drawer front height can adjust to 1-3mm
- Suitable drawer wall thickness: 16mm/18mm
- Length: 250mm-600mm
- Packing: 10 sets/ctn

产品 Product

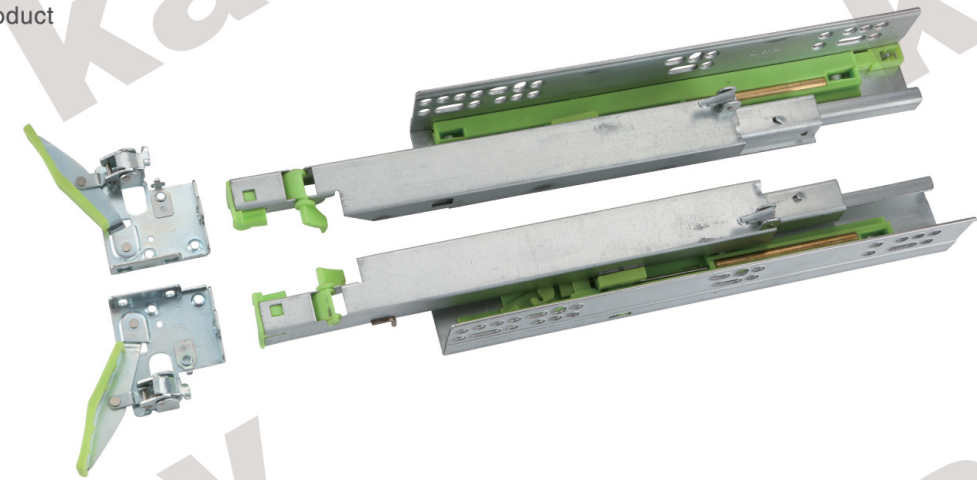

侧轨安装孔位置 Cabinet profile screw positions

